

Low-Profile Stainless Steel Floor Scale for Washdown Applications



Hygienic Applications

With its rugged stainless steel construction, the PUA579 floor scale is durable enough for heavy use in hygienic environments. It is suitable for facilities where harsh washdown is required, including those that process foods or pet foods.




Live Side Rails

The scale is designed for versatility. Because the side rails are live parts of the weighing platform, you can place loads on both the rails and platform. The live side rails enable the scale to weigh objects of varying shapes and sizes.



Ultra-Low Profile

The scale's load cells are located under side rails, allowing the platform to be built close to floor level. Because of the scale's exceptionally low profile, you can move loads on and off the platform quickly, safely, and easily.



Rocker-Foot Suspension

The scale uses a rocker-foot suspension that automatically aligns to ensure vertical loading. This type of suspension is more accurate and durable than threaded connections.

PUA579 Floor Scale

The PUA579 floor scale combines robust construction, easy-to-clean surfaces, and an exceptionally low profile. It is durable enough to provide accurate, reliable weighing while standing up to constant use in wet and corrosive environments. Made entirely of stainless steel, it is suitable for hygienic applications that require frequent washdown. Choose from a variety of finishes that resist scratching and are exceptionally easy to clean. The scale design eliminates hard-to-clean corners and gaps where contaminants can collect. By reducing the time and effort required for cleaning, the PUA579 floor scale helps you increase productivity.

PUA579 Floor Scale

Specifications

Standard Platform Size	24x24, 30x30, 36x36, 42x42, 48x48, and 48x60 inches (610x610, 762x762, 914x914, 1067x1067, 1219x1219, and 1219x1524 mm)
Available Capacities	500 lb / 300 kg, 1000 lb / 600 kg, 2500 lb / 1500 kg, and 5000 lb / 3000 kg
Platform Height	1½, 2⅛, and 2¾ inches (41, 54, and 67 mm)
Standard Construction	Type 304 stainless steel
Load Cell Type	Four 350-ohm load cells; hermetically sealed stainless steel
Load Cell Suspension	Stainless steel rocker-foot assembly
Junction Box	Stainless steel IP69K
End Loading	100% end loading
Standard Operating Temp.	14°F to 104°F (-10°C to 40°C)
Metrological Approvals	NTEP, Measurement Canada (pending), OIML
Hazardous Area Approvals	FM, CSA, Ex, ATEX
Shipping Weight	114, 125, 211, 297, 375, and 545 lb (52, 57, 96, 135, 170, and 247 kg)
Standard Instrument Cable Length	25 feet (7.6 meters)
Compatible METTLER TOLEDO Instruments	Most METTLER TOLEDO terminals

Features

Benefits

Ultra-Low Profile	Placing loads on scale is safer and easier.
Top-of-Floor Installation	Eliminates need to construct and clean a pit.
Stainless Steel Construction	Suitable for harsh washdown.
Hermetically Sealed Load Cells	Maximum protection in wet and corrosive environments.
100% End Loading	Ideal for concentrated loads such as drums and totes.
Mechanical Overload Stop	Protects load cells from damage caused by overloading.
Locating Plates	Positions the scale securely.
NTEP Class III, 5000d	Legal-for-Trade applications.



The PUA579 floor scale has easy-to-clean stainless steel surfaces that make it suitable for applications requiring harsh washdown.


Options

- Ramps
- Free-standing columns
- Instrument mounting brackets
- Longer load cell cables
- Factory calibration
- Stop bars
- Optional material: Type 316 stainless steel
- Optional finishes: Electropolishing, mechanical polishes



IP69K junction box for extra protection.

Optional stop bars help position loads on the platform.

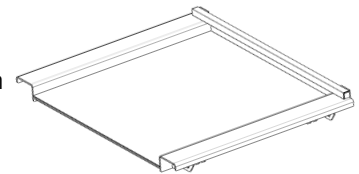

www.mt.com/floorscale

For more information



Produced in a facility that is



Mettler-Toledo, Inc.

1900 Polaris Parkway
Columbus, Ohio 43240
Tel. (800) 786-0038
(614) 438-4511
Fax (614) 438-4900

Specifications subject to change without notice.
© 2011 Mettler-Toledo, Inc.
02/2011
109-FS03494.0E